


CTR CAT BI INTL (WCI)

AREA CHART - ICAO

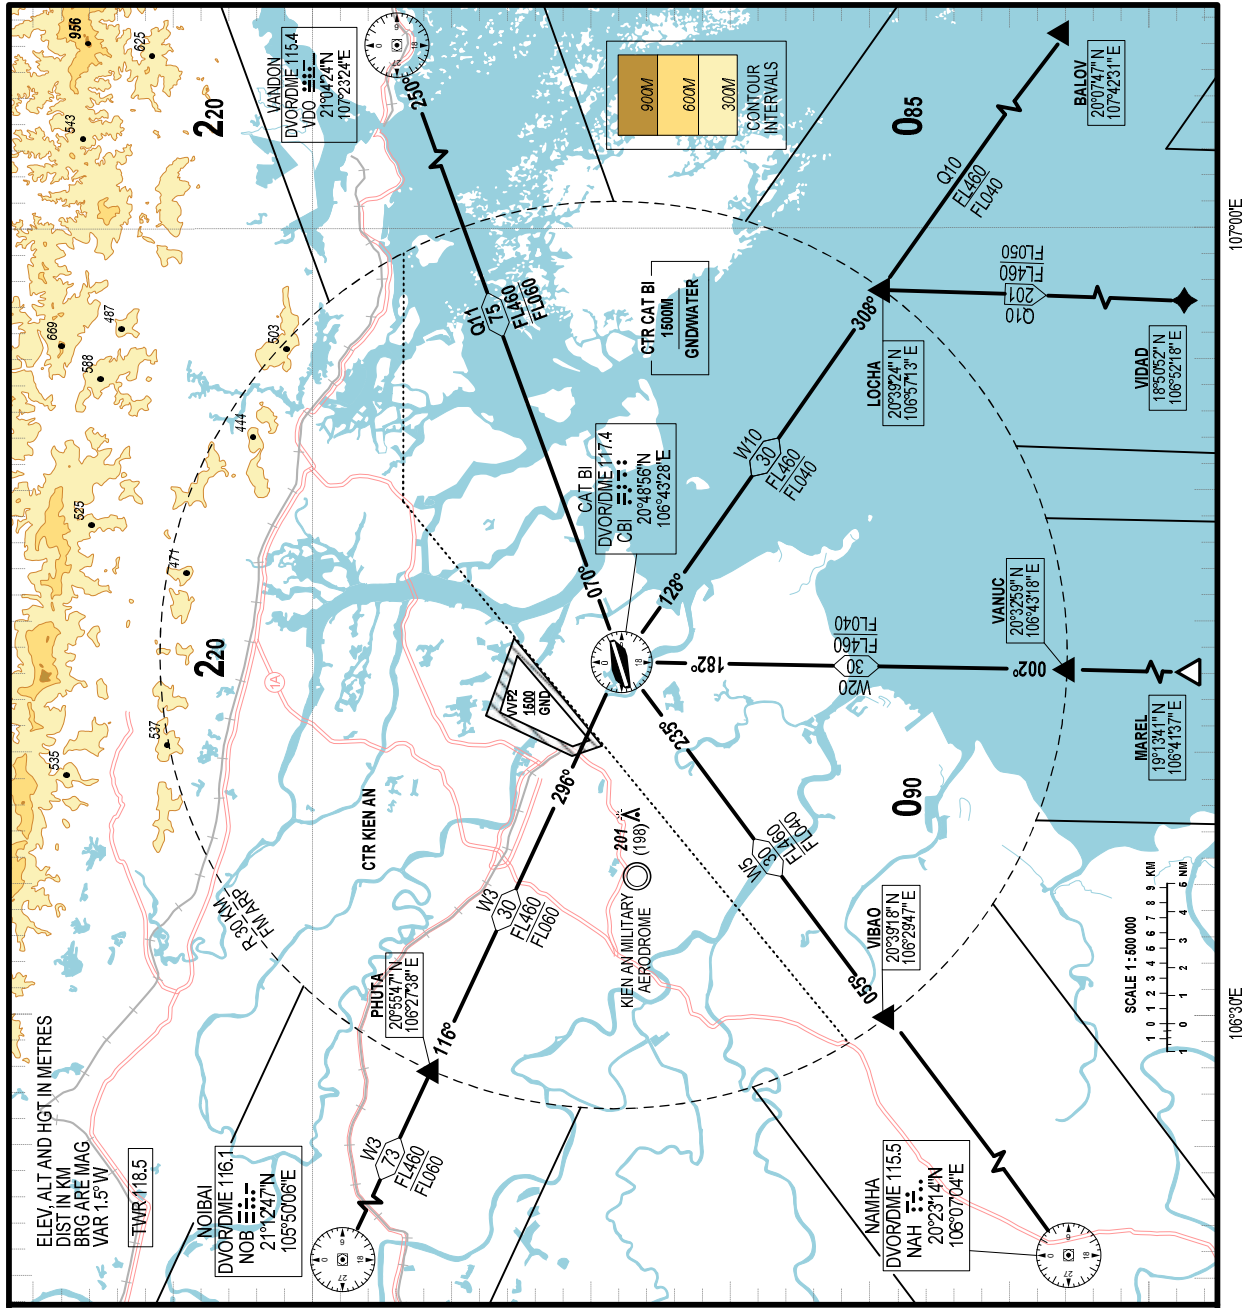

LEGEND	
CONTROL AREA	(TMA) (AWY)
CONTROL ZONE	(CTR)
REPORTING POINT	(COMPULSORY)
DEPARTURE/ARRIVAL ROUTING	W3
DISTANCE IN KILOMETRES	73
MAGNETIC BEARING	126°
RADIO NAVIGATION AIDS	NAME NAVAID TYPE AND FREQUENCY IDENTIFICATION COORDINATES

AREA MINIMUM ALTITUDE (AMA)  
EACH 1° QUADRILATERAL CONTAINS AN AREA MINIMUM ALTITUDE (AMA) WHICH REPRESENTS THE LOWEST ALTITUDE WHICH MAY BE USED UNDER INSTRUMENT METEOROLOGICAL CONDITIONS (IMC). THE AMA PROVIDES A MINIMUM CLEARANCE OF 300 METRES (600 M IN MOUNTAINOUS AREAS) ABOVE ALL OBSTACLES IN THE QUADRILATERAL. IT IS REPRESENTED IN THOUSANDS AND TENS OF METRES ABOVE MEAN SEA LEVEL (MSL).  
EXAMPLE: 2 200 METRES 220

CHANGES: VAR AND ADDITION OF ATS ROUTE Q11.