

AERODROME CHART - ICAO 21°13'18"N AD ELEV 13M TWR: 118,4 HA NOI/NOI BAI INTL (VVNB)
105°48'20"E GND: 121,9

RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
11L	107°	21°13'31"N 105°47'33"E	PCN 98/R/B/W/T
29R	287°	21°13'00"N 105°49'19"E	PCN 99/R/B/W/T
11R	107°	21°13'29"N 105°47'11"E	
29L	287°	21°12'53"N 105°49'17"E	



ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC



TWYS WIDTH:
- N, N1, N2, N3, N4, N5: 14M.
- P3, P4, P5, P6, P7, P8, P9, S, S1, S3, S5, S8, S9, S10, V, V1, V2, V5: 23M.
- S6, S7, V6: 27M.
- S4: 28M.
- V3, V4, V7: 38M.
- V8, V9: 30M.

TWYS BEARING STRENGTH:
- N, N1, N2, N3, N4, N5, S8, V5, S3: PCN 54/R/C/W/U.
- S, S7, V1, V2, V3, V4, V7: PCN 65/R/B/W/T.
- P4, P7, P9, S9, S10: PCN 95/R/B/W/T.
- V8, V9: PCN 85/R/B/W/T.
- P5, P6, P8: PCN 96/R/B/W/T.
- S6, V6: PCN 60-70/R/C/W/U.
- P3, S1: PCN 98/R/B/W/T.
- S4, S5: PCN 97/R/B/W/T.
- V: PCN 54/R/B/W/T.



APRON BEARING STRENGTH:
- APRON 1 (INCLUDING TERMINAL T1, T2, CARGO TERMINAL): PCN 66/R/B/W/T.
- APRON 2: PCN 85/R/B/W/T.
- APRON HANGAR: PCN 54/R/B/W/T.

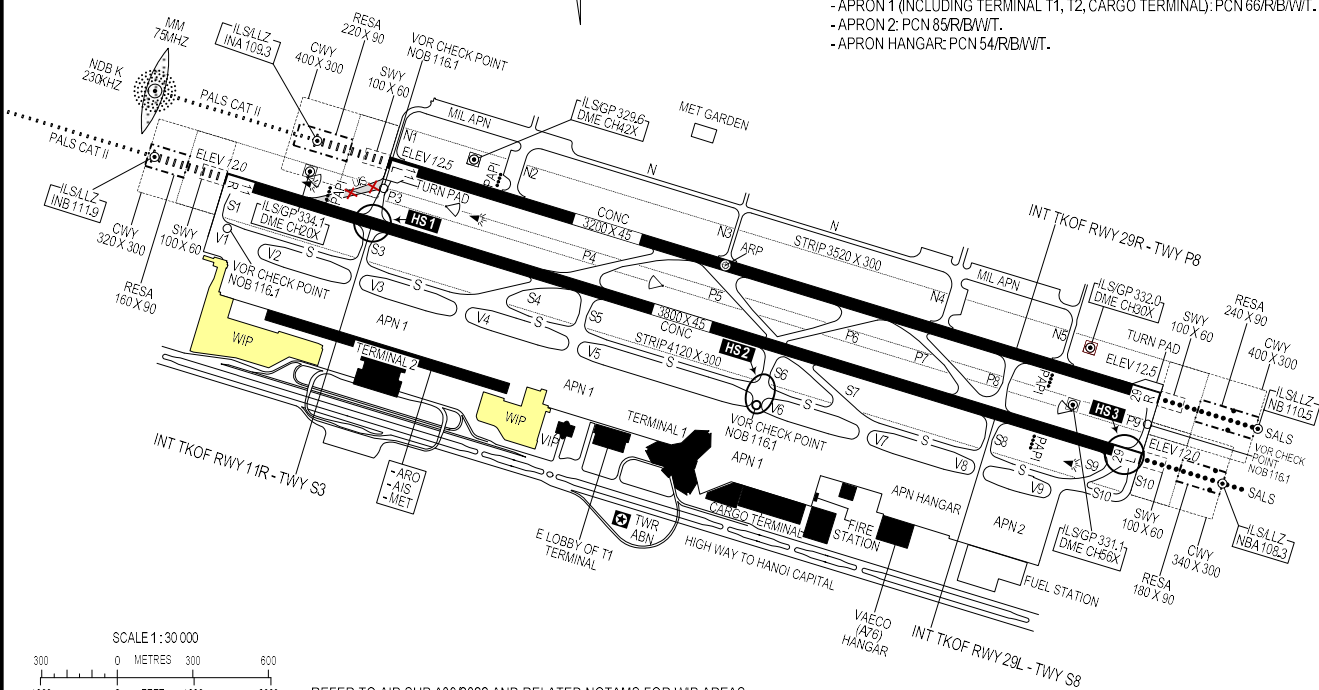

REFER TO AIP SUP A39/2022 AND RELATED NOTAMS FOR WIP AREAS.


LGT AIDS THR RWY 11L/29R	LGT AIDS THR RWY 11R/29L	LEGEND	
		VOR CHECKPOINT AND FREQUENCY	○ NOB 116.1
		HOT SPOT AND NAME	○ HS1
		BUILDINGS	■
		CLOSED	✗
		RUNWAY VISUAL RANGE (RVR)	▷
		WIND DIRECTION INDICATOR (WDI)	↖
		TWY/RWY EDGE LIGHTS, RCL LIGHTS, TDZ LIGHTS	●

MARKING AIDS RWY 11L/29R AND EXIT TWY

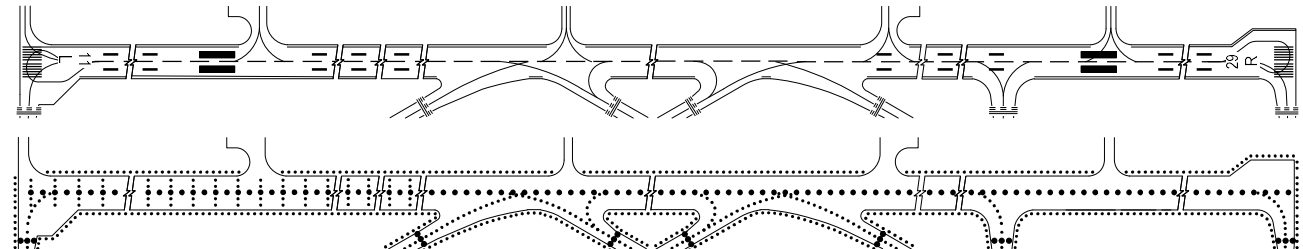

LGT AIDS RWY 11L/29R AND EXIT TWY

MARKING AIDS RWY 11R/29L AND EXIT TWY

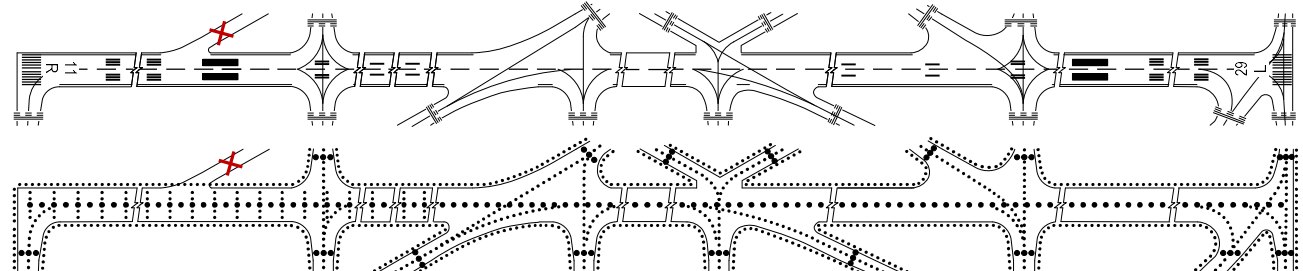

LGT AIDS RWY 11R/29L AND EXIT TWY

CHANGES: RENAMING OF TWYS, APN AND HOT SPOTS; PCN OF TWY AND APN; TWYS WIDTH.