© 2019 Civil Aviation Authority of Viet Nam

LEGEND

CONTROL AREA	(TMA) (AWY)	———
CONTROL ZONE	(CTR)	- - - - - - - -
REPORTING POINT	(COMPULSORY)	▲
DEPARTUDE/ARRIVAL ROUTING		Q11
DISTANCE IN KILOMETRES		73
MAGNETIC BEARING		070°

RADIO NAVIGATION AIDS

NAME
NAVAID TYPE AND FREQUENCY
IDENTIFICATION
CORRDINATES

VADON
DVOR/DME 115.4
VDO
21°04'24"N
107°23'24"E

AREA MINIMUM ALTITUDE (AMA)

EACH 1° QUADRILATERAL CONTAINS AN AREA MINIMUM ALTITUDE (AMA) WHICH REPRESENTS THE LOWEST ALTITUDE WHICH MAY BE USED UNDER INSTRUMENT METEOROLOGICAL CONDITIONS (IMC). THE AMA PROVIDES A MINIMUM CLEARANCE OF 300 METRES (600 M IN MOUNTAINOUS AREAS) ABOVE ALL OBSTACLES IN THE QUADRILATERAL. IT IS REPRESENTED IN THOUSANDS AND TENS OF METRES ABOVE MEAN SEA LEVEL (MSL).

EXAMPLE: 2200 METRES 2_{20}

NOTES:

- OPERATIONAL LIMITATION OF VOR/DME VDO:

  + COVERAGE OF VOR/DME VDO IS LIMITTED FROM *RDL125 TO RDL152* WHEN MAKING AN ORBIT 37 KM AT 2200 M ALT.

  + COVERAGE OF VOR/DME VDO IS LIMITTED FROM *RDL135* TO *RDL160*, *RDL237 TO RDL243* AND FROM *RDL295 TO RDL305* WHEN MAKING AN ORBIT 74 KM AT 2750 M ALT.

- MILITARY TRAINING AREAS AT CAT BI AIRPORT INCLUDING 7 AREAS NUMBERED FROM 1 TO 7 ARE REFER TO CATBI AERODROME OPERATION REGULATION.

- SIGHTSEEING AREA OVER HALONG BAY OF HAI AU AVIATION JOINT-STOCK COMPANY:

  + AIRCRAFT: SEA PLANE.

  + UPPER LIMIT 500M (OTHER ALTITUDES MUST BE APPROVED BY RELATED ATC UNITS).
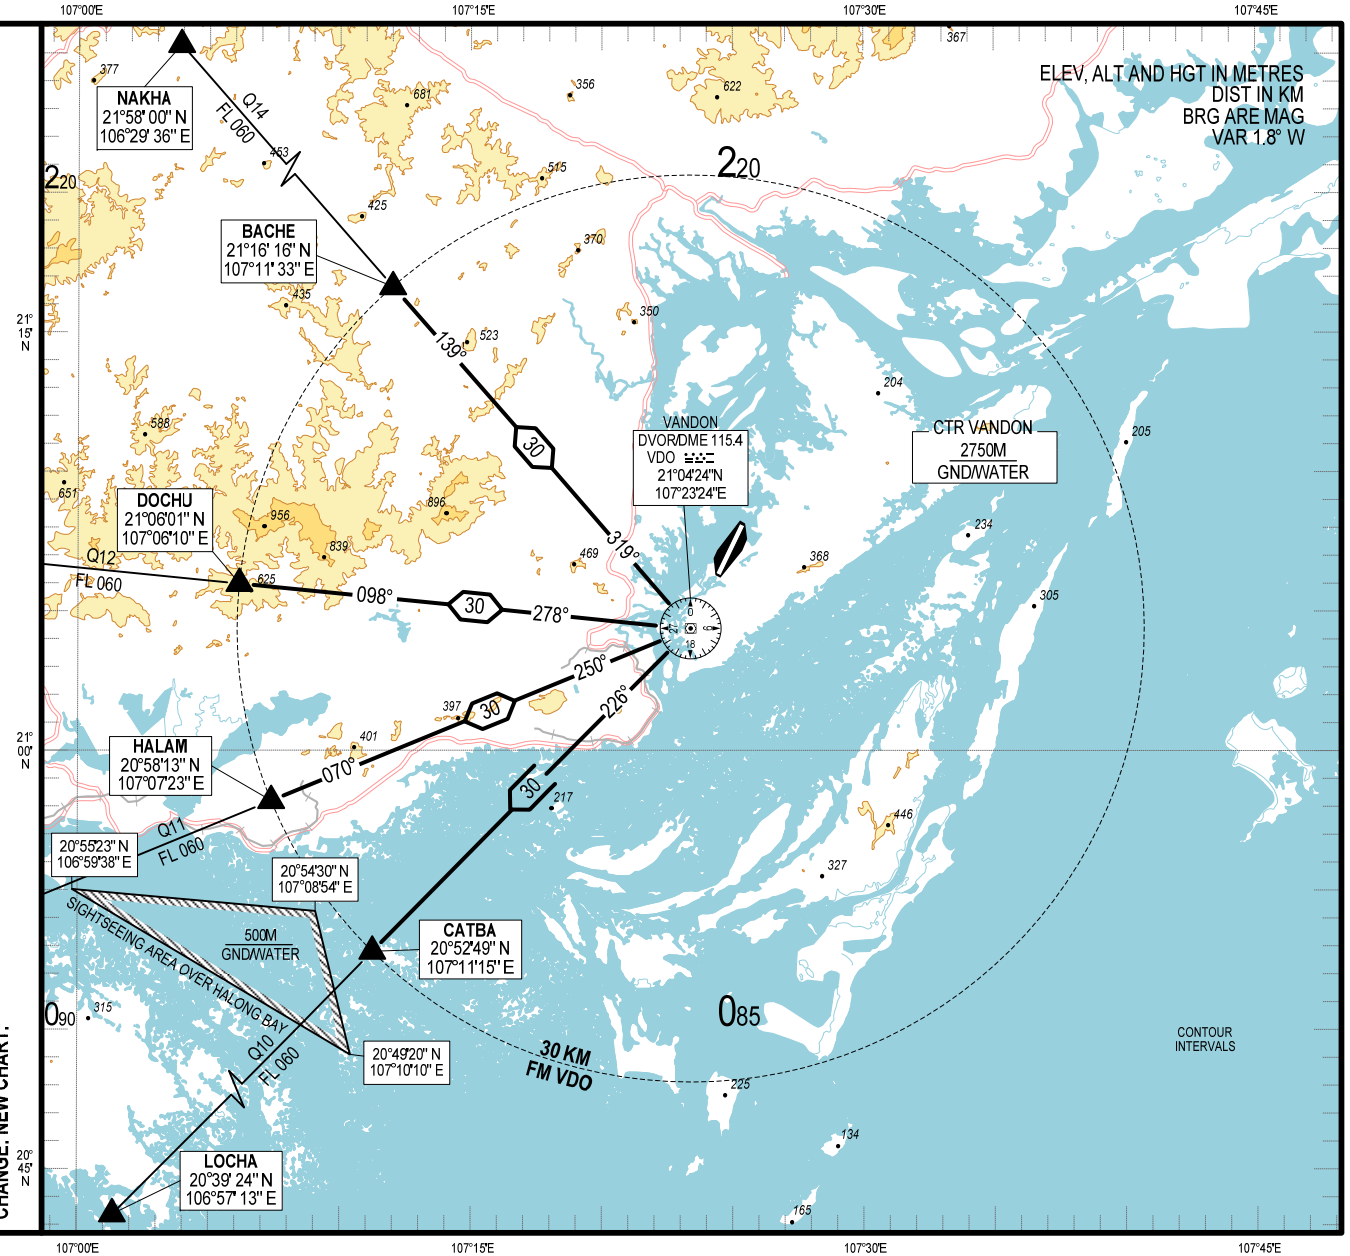
CHANGE: NEW CHART.